


12.10 Casework / Millwork Finishes

Finishes shall be assigned to the properties of the piece of casework that is inserted into the room area. Parameters are created and added to the casework properties for finish assignments.

Finishes that are assigned to the piece of casework properties shall be formatted into a Casework / Millwork Schedule to be placed on the sheet. Only rooms that have casework or millwork inserted into them will be generated in the schedule.

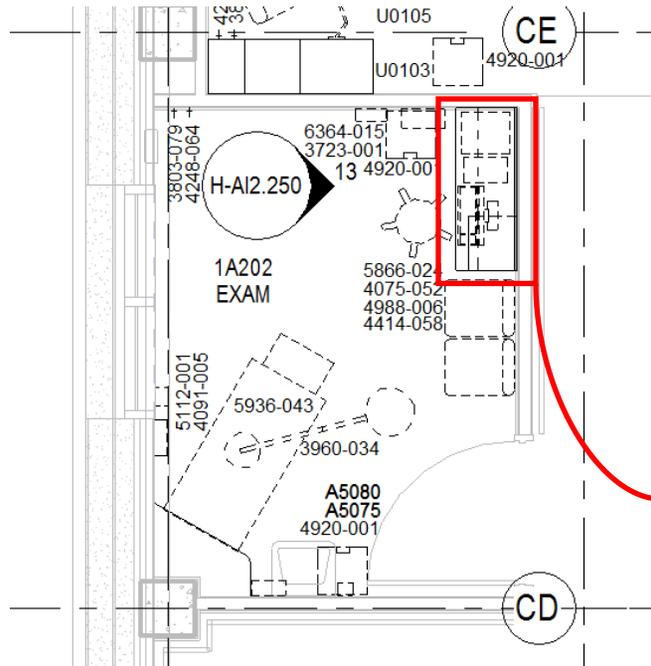

| CASEWORK FINISH SCHEDULE SHEET H-IN6.521 | | | | | |
|--|------------------|-------|---------|---------------------|-----------|
| ROOM NUMBER | ROOM NAME | BASE | COUNTER | TRANSACTION COUNTER | VERTICAL |
| C1 | | | | | |
| 1A101 | WAITING | | SSM-15 | | HPDL-6 |
| 1A202 | EXAM | RB-3A | SSM-14 | | HPDL-6 |
| 1A207 | NURSE STATION | RB-3 | SSM-15 | SSM-15 | HPDL-6,16 |
| 1A216 | ISOLATION | RB-3A | SSM-15 | | HPDL-6 |
| 1A301 | TRAINING | RB-3A | SSM-14 | | HPDL-6 |
| 1A304 | CLEAN PROCESSING | RB-3A | SSM-14 | | HPDL-6 |

Instance Properties

Family: CW-Counter Top- Splash Straight Load...

Type: 20d x 30h Edit Type...

Instance Parameters - Control selected or to-be-created instance

| Parameter | Value |
|-------------------------------------|-----------------------------------|
| CW Transaction Material Key | |
| CW Transaction Manufacturer Key | |
| CW Transaction Manufacturer No. Key | |
| CW Transaction Pattern Key | |
| CW Transaction Color Key | |
| CW Transaction Size Key | |
| CW Transaction Finish Remarks | |
| CW Vertical Finish Code Key | HPDL-6 |
| CW Vertical Material Key | HIGH PRESSURE DECORATIVE LAMINATE |
| CW Vertical Manufacturer Key | NEVAMAR |
| CW Vertical Manufacturer No. Key | W8369T |
| CW Vertical Pattern Key | |
| CW Vertical Color Key | TOPAZ KHAYAWOOD |
| CW Vertical Size Key | |
| CW Vertical Finish Remarks | |
| CW Remarks No. Key | |
| CW Remarks Description Key | |
| CW Base Material Key | RUBBER BASE |
| Dimensions | |
| Length | 4' 6" |
| Identity Data | |
| IN CW Base Key | RB-3A 4" TERRA FIRMA |
| IN CW Counter Key | SSM-14 |
| IN CW Transaction Counter Key | (none) |
| IN CW Vertical Key | HPDL-6 |
| IN CW Finish Remarks Key | (none) |
| Comments | |
| Mark | |
| Workset | Interior Construction |

OK Cancel